

Imagine the invisible


Research & Development

Bobcat-GigE Scientific series

Small form factor SWIR InGaAs camera



Low noise with ready to use GigE Vision interface

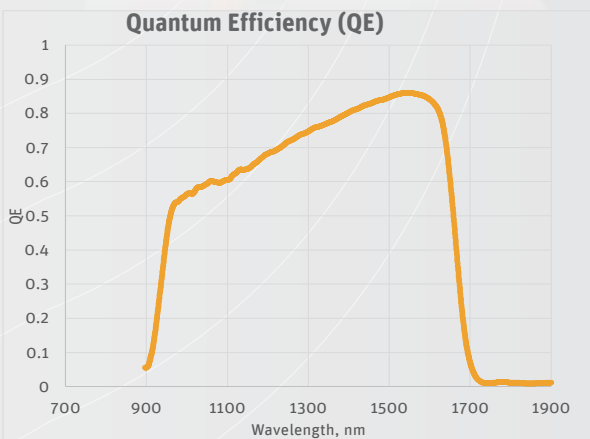


With superior image quality, the Bobcat-GigE Scientific is available as a complete digital infrared camera system with on-board image processing. The cameras comes in two versions:

- Bobcat-320-GigE Scientific with 320 x 256 resolution
- Bobcat-640-GigE scientific with 640 x 512 resolution

The Bobcat-GigE comes with an industry-standard GigE Vision interface which makes it much easier to integrate in your own set-up.

You can look through glass with the Bobcat-GigE SWIR camera, so standard C-Mount lenses and protective camera housings can be used. This makes the camera affordable for a wide variety of R&D applications.

Designed for use in

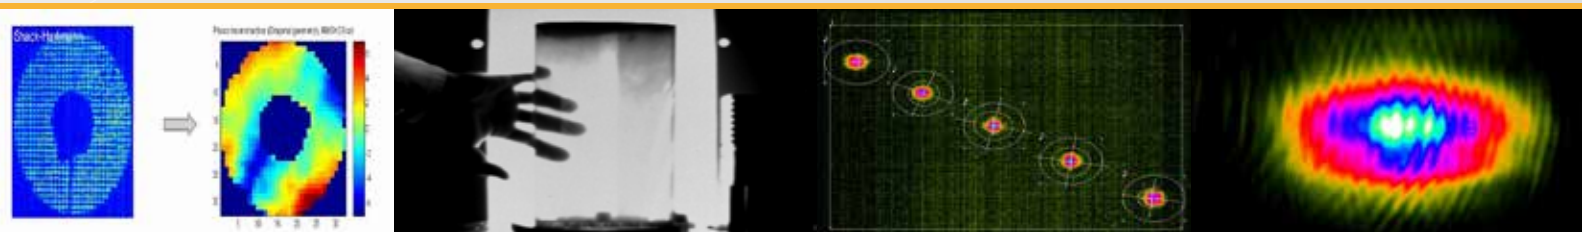

Wavefront Sensing

Silicon ingot and brick inspection

Laser beam analysis

Applications

- Semiconductor inspection
- Adaptive Optics / Wavefront Sensing
- Fiber optic alignment
- Fiber optic device inspection
- Art, painting inspection
- Laser analysis
- Solar cell inspection

Benefits & Features

- Small form factor with GigE interface
- On board image processing features
 - 4 Fixed Non-Uniformity Corrections
 - Autogain and Offset Control
- Wide operating temperature range
- High sensitivity and excellent image quality
- Flexible programming in an open architecture

Broad range of accessories available to simplify your research

SWIR lenses available



Discover our Lens Selector Guide
www.xenics.com/LSG

Also included:

- Power Supply
- Trigger cable
- Ethernet Cable(GigE) in transit case



Inputs

Trigger in or out



Gigabit Ethernet

Software



- Xeneth advanced
- Xeneth SDK
- Xeneth LabVIEW SDK (optional)

Outputs

Specifications

Camera specifications	Bobcat-320-GigE (100 Hz)	Bobcat-320-GigE (400 Hz)	Bobcat-640-GigE
Lens			
Focal length	Broad selection of SWIR lenses available*		
Optical interface	C-mount (optional filter retaining ring available)		
Imaging performance			
Frame rate	100 Hz	400 Hz	100 Hz
Window of interest	NA	Minimum size 32 x 4	
Integration type	Snapshot		
Exposure time range	1 μ s - 40 ms		1 μ s - 40 ms in high gain mode**
Noise ***	120 e- (ROIC Noise 60 e-)		High gain: 120 e- (ROIC Noise 60 e-) Low gain: 400 e-
Readout mode	Integrate Then Read (ITR)		Integrate Then Read (ITR) Integrate While Read (IWR)
Onboard image processing A to D conversion resolution	4 Fixed Non Uniformity Calibrations (NUC) for fixed exposure time can be uploaded, auto gain 14 bit		
Control & Data			
Camera control	GigE Vision		
Image acquisition	GigE Vision		
Trigger	Trigger In or Out (configurable)		
Electrical specifications			
Power consumption***	+/- 4 W (without TEC)		
Power supply	12 V		
Environmental characteristics			
Shock	40 G, 11 ms halfsine profile, according to MIL-STD810G		
Vibration	5 G, (20 Hz to 2000 Hz), according to MIL-STD883J		
Operating case temperature	-40 °C to 70 °C (industrial components)		
Storage temperature	-45 °C to 85 °C (industrial components)		
Dimensions	55 W x 55 H x 82 L mm (without lens)		
Weight camera head	+/- 334 g (lens not included)		

* SWIR lenses in the 900 - 1700 nm range
 ** Standard calibration packs not valid under 100 μ s
 *** Typical values

Array specifications	Bobcat-320-GigE	Bobcat-640-GigE
Sensor type	InGaAs Focal Plane Array (FPA) ROIC with CTIA**** topology	
Spectral band	0.9 to 1.7 μ m	0.9 to 1.7 μ m Optional 0.4 to 1.7 μ m (VisNIR)
# pixels	320 x 256	640 x 512
Pixel pitch	20 μ m	
Quantum efficiency	Peak value +/- 80 %	
Gain (Full well sizes)	100 Ke-	High gain: 60 Ke- Low gain: 900 Ke-
Array cooling	TE1-stabilized	
Pixel operability	> 99 %	
Detector size	6.4 mm x 5.12 mm (0.25" x 0.2")	12.8 mm x 10.24 mm (0.5" x 0.4")
Image diagonal	8.2 mm (0.32")	16.4 mm (0.64")

**** Capacitor TransImpedance Amplifier

Product selector guide

Part number	Model	Interface	Frame rate	VisNIR
XEN-000296	Bobcat-640-GigE	GigE Vision	100 Hz	No
XEN-000099	Bobcat-640-GigE			Yes
XEN-000621	Bobcat-320-GigE (100Hz)			No
XEN-000622	Bobcat-320-GigE (400Hz)		400 Hz	No

XB-077 Issue 11 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. This information supersedes all previously supplied information.